

Understanding Event Processes in Natural Language Event-Centric Natural Language Processing (Part III)

Muhao Chen

Department of Computer Science / Information Sciences Institute University of Southern California

Aug 2021

ACL Tutorials

Event-Centric Natural Language Processing




How Do Machines Understand the *Evolution* of Events?

Human Language Always Communicates About Events



Earning a PhD in Computer Science typically takes around 5 years. It first involves *fulfilling the course requirements* and *passing qualification exams*. Then within several years, the student is expected to *find a thesis topic*, *publish several papers* about the topic and *present them in conferences*. The last one or two years are often about *completing the dissertation proposal, writing* and *defending the dissertation*.

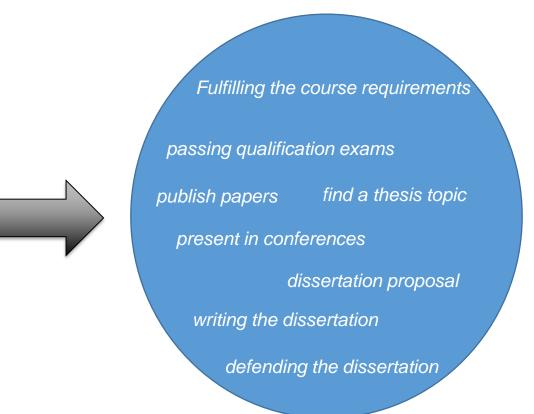


Event-centric IE has helped machines in

- Recognition and typing events
- Inducing the relations between two events
- Identifying the equivalence of events



Extraction only is not enough.

Events are NOT simple, static predicates.

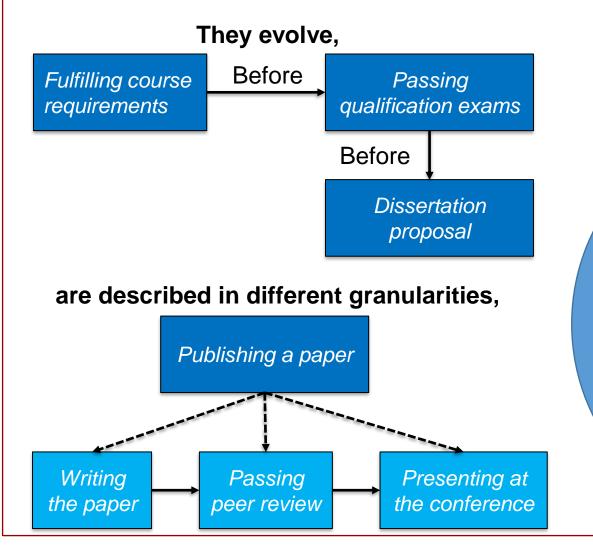

and are always directed by specific intents or central goals [Zacks et al. *Nature Neuroscience*, 2001]

Fulfilling the course requirements

passing qualification exams

publish papers find a thesis topic present in conferences dissertation proposal

writing the dissertation


defending the dissertation





An event process (or event chain)

• Partially ordered events that are centered around common protagonists [Chambers et al., ACL-08]

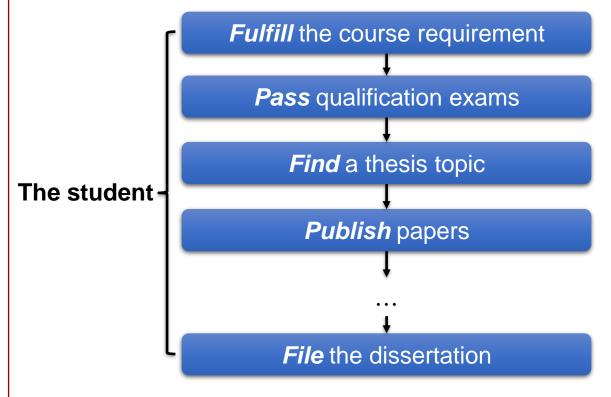

Prediction problems on event processes

Event process completion

• What happens next?

Intention prediction

• What is the goal of "*digging a hole, putting* some seeds in the hole and filling it with soil"?

Membership prediction

• What are the steps of "buying a car"?

Salience prediction

 Is defending the dissertation more important than doing an internship?

Event Processes Are Essential to Downstream NLU Tasks



Narrative prediction

One day Wesley's auntie came over to visit. He was happy to see her, because he liked to play with her. When she started to give his little sister attention, he got jealous. He got angry at his auntie and bit his sister's hand when she wasn't looking.


Then what might happen?



O2: She gave him a cookie for being so nice.

Machine comprehension


Water is split, providing a source of electrons and protons (hydrogen ions, H⁺) and giving off O₂ as a by-product. *Light absorbed* by chlorophyll drives a *transfer of the electrons* and hydrogen ions from water to an acceptor called NADP⁺.

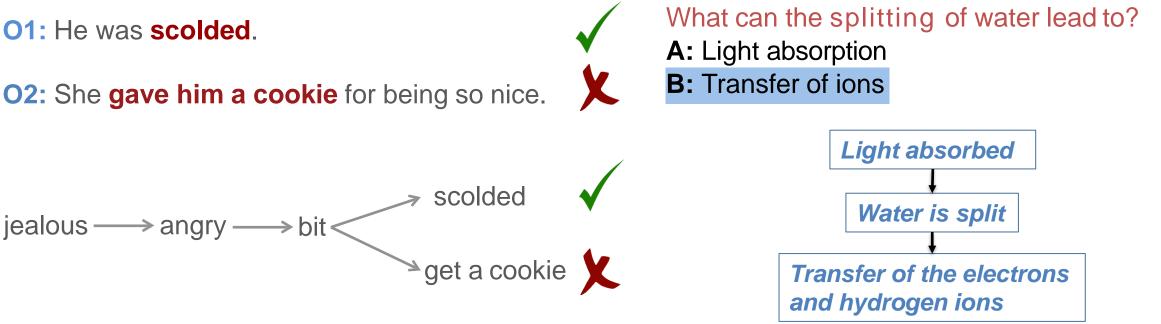


Agenda






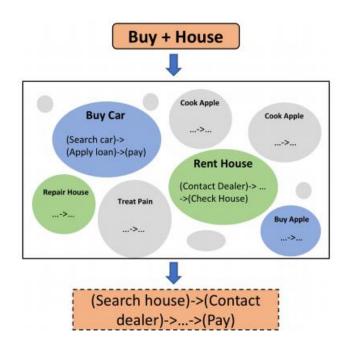

2. Event intention prediction

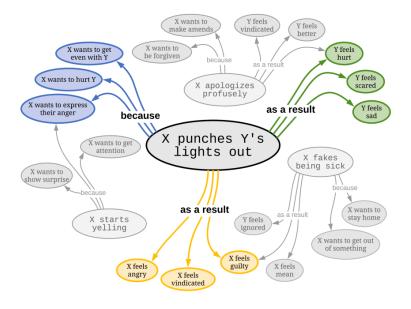

3. Event processes in downstream NLU tasks

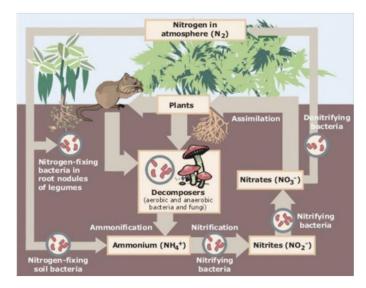



4. Open Research Directions




Agenda






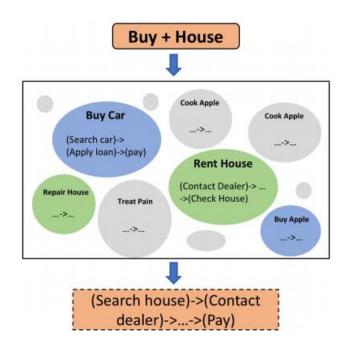

2. Event intention prediction

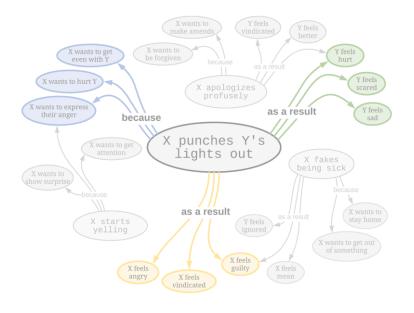


3. Event processes in downstream NLU tasks

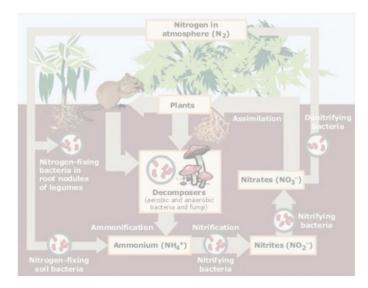

4. Open Research Directions



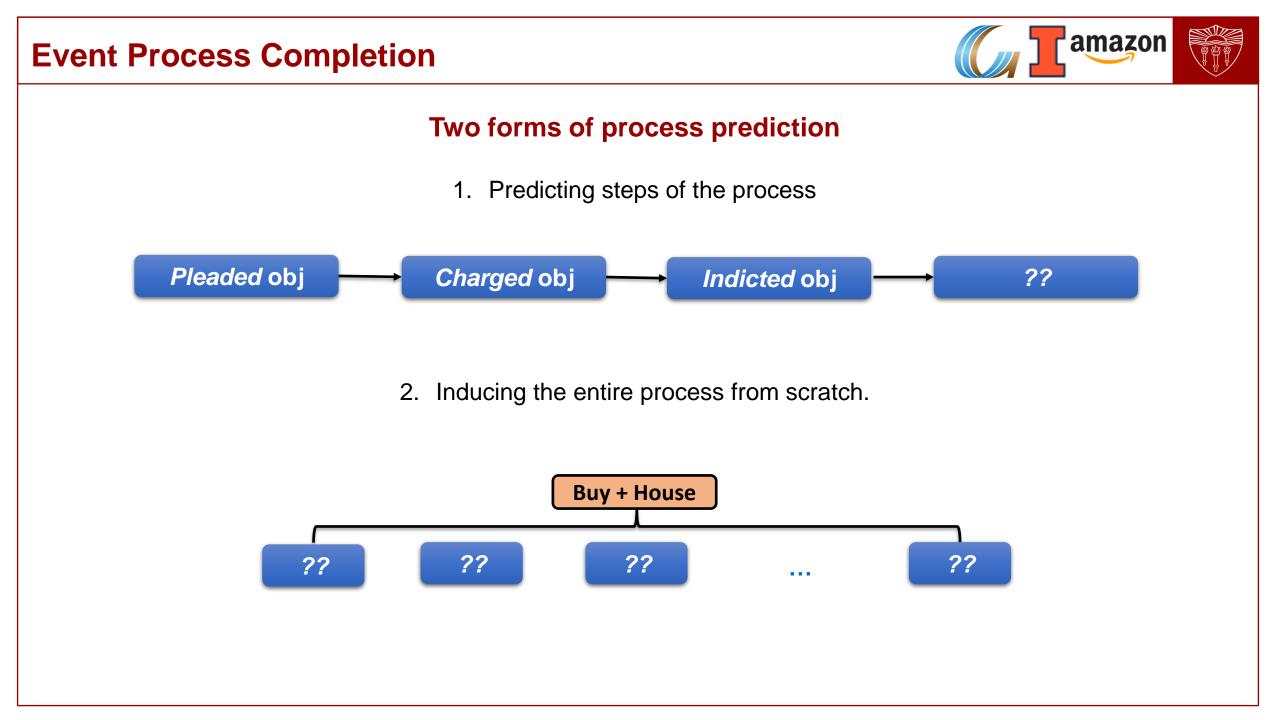

Event Process Completion

Chambers and Jurafsky. Unsupervised Learning of Narrative Event Chains. ACL-08

Unsupervised event process completion can be done using corpus statistics (Gigaword in this work)

Capturing the co-occurrence of events using pointwise mutual information

pmi(e(w,d),e(v,g))

• The next most likely forthcoming event can be found by maximizing the accumulated PMI

$$\max_{j:0 < j < m} \sum_{i=0}^{n} pmi(e_i, f_j)$$

(n: #events in the process; m: #events in the vocabulary.

Known events:

(pleaded subj), (admits subj), (convicted obj)

Likely Events:

sentenced obj	0.89	indicted obj	0.74
paroled obj	0.76	fined obj	0.73
fired obj	0.75	denied subj	0.73



Improves narrative cloze tests (36% improvement on NYT Narrative Cloze).


amazoi

Event Process Completion



Radinsky and Horvitz. Mining the Web to Predict Future Events. WSDM, 2013

Extension of the event chain model on multiple dated and topically cohesive documents.

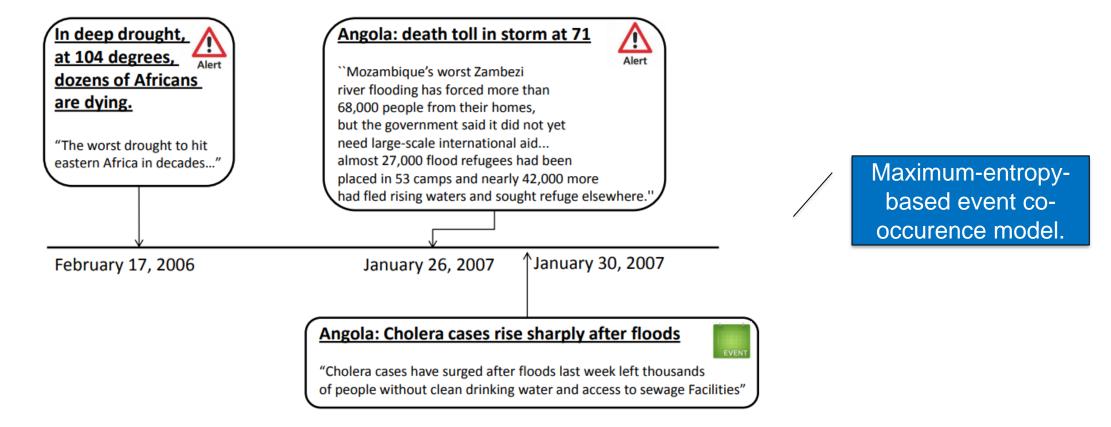


The likelihood of cholera rising is predicted high after a drought followed by storms in Angola (based on corpus statistics).

Analogous Event Process Induction




Can we perform *de novo* process induction?

Zhang, et al. Analogous Process Structure Induction for Sub-event Sequence Prediction. EMNLP, 2020

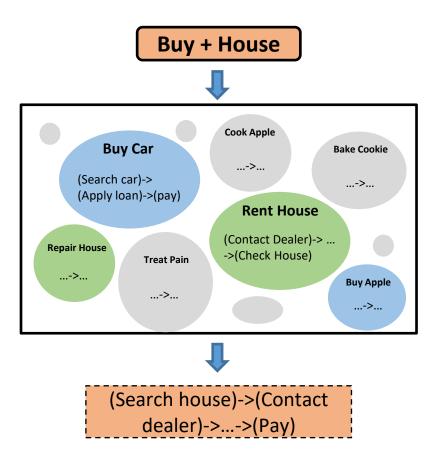

Analogous Event Process Induction



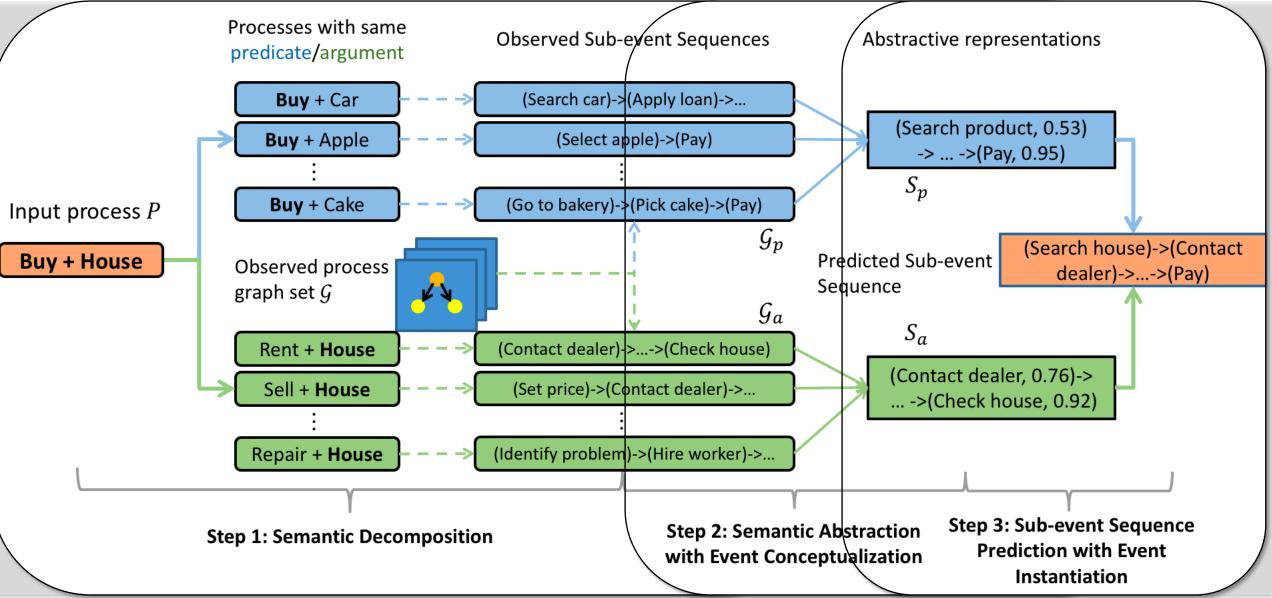



Model		0	Match	Hypernym Allowed	
	1	E-ROUGE1	E-ROUGE2	E-ROUGE1	E-ROUGE2
Random		2.9165	0.4664	23.5873	8.1089
Seq2seq (GloVe)		5.0323	1.4965	27.8710	13.0946
Seq2seq (RoBERTa)		4.5455	0.4831	28.0032	12.8502
Top one similar process (Jaccard)		8.8589	5.1000	28.6548	14.6231
Top one similar process (GloVe)		9.8797	5.1452	29.4203	13.6001
Top one similar process (RoBERTa)		9.2599	4.7390	30.6599	15.8417
Analogous Process Structure Induction (APSI)		14.8013	6.6045	36.1648	19.2418
Human		29.0189	15.2542	50.4647	29.4423

(a) Basic Setting (for each sub-event, we only predict and evaluate the verb)

Model		String Match		Hypernym Allowed	
		E-ROUGE1	E-ROUGE2	E-ROUGE1	E-ROUGE2
Random		0.0000	0.0000	0.5104	0.0903
Seq2seq (GloVe)		0.1935	0.0534	0.9677	0.1069
Seq2seq (RoBERTa)		0.4870	0.0000	1.7857	0.2899
Top one similar process (Jaccard)		0.6562	0.2257	2.4797	0.5867
Top one similar process (GloVe)		0.8750	0.2106	2.8801	0.7372
Top one similar process (RoBERTa)		0.9479	0.3009	3.2811	0.9929
Analogous Process Structure Induction (APSI)		3.4988	0.4513	6.1611	1.1885
Human		11.6351	5.5905	18.0034	8.2695

(b) Advanced Setting (for each sub-event, we predict and evaluate all words)

Quantitative results

Process Name:	Treat Pain
---------------	------------

References: ('learn cause'->'identify symptom'->'see doctor') ('identify cause'->'learn injury'->'recognize symptom'->`recognize symptom')

APSI Prediction: ('Identify symptom'->'see doctor'-

>'recognize symptom'->'take supplement')

Qualitative results


Resources are available at <u>https://cogcomp.seas.upenn.edu/page/publication_view/910</u>¹⁴

Agenda






2. Event intention prediction

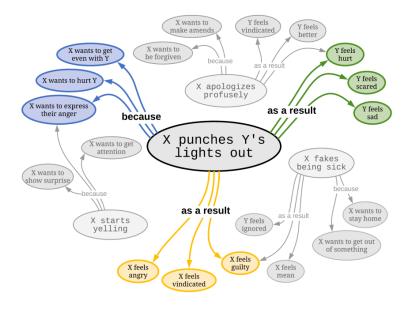


3. Event processes in downstream NLU tasks

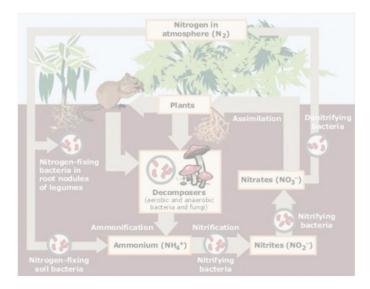

4. Open Research Directions



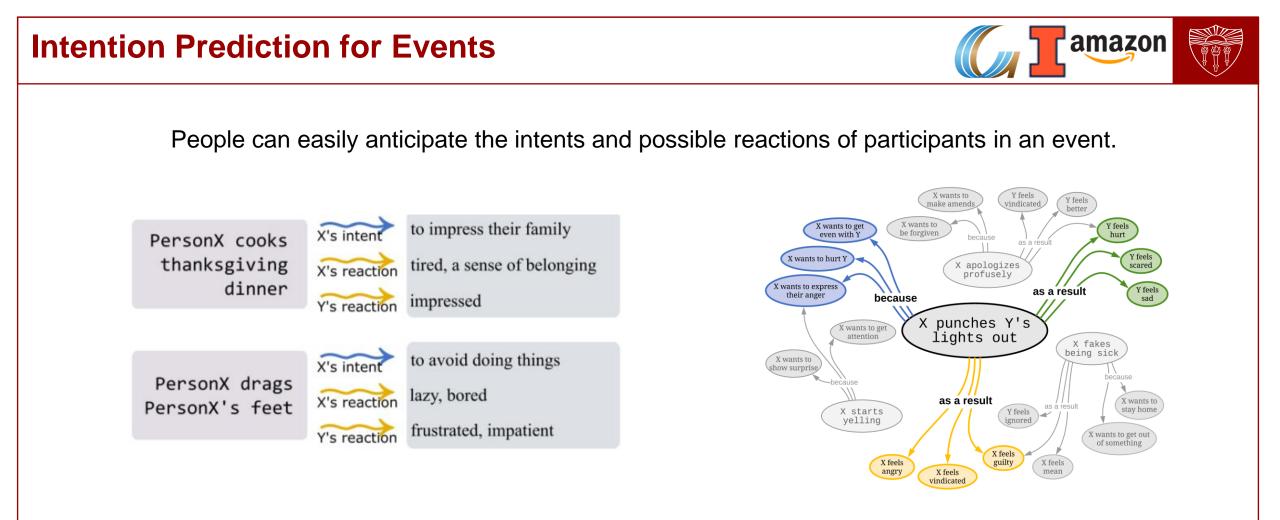

A commonsense-aware system should also perform such prediction.

Event2Mind – A learning system that understands stereotypical intents and reactions to events (Rashkin et al. ACL-18)

Event2Mind



Is developed based on large crowdsourced corpora:

- 25,000 events
- Free-form descriptions of their intents and reactions

Performs Seq2NGram generation:

PersonX cooks steak


```
PersonX's intent: ["steak", "to kill their hunger", "to make dinner for the family", "to eat steak"]
```


PersonX's reaction: ["excited", "accomplished", "proud", "full"]

Other people's reaction: ["none", "happy", "person x cooked well."]

More follow-ups of Event2Mind

- ATOMIC: An Atlas of Machine Commonsense for If-Then Reasoning (Sap+ AAAI 2019)
- COMET: Commonsense Transformers for Automatic Knowledge Graph Construction (Bosselut+, ACL-19)

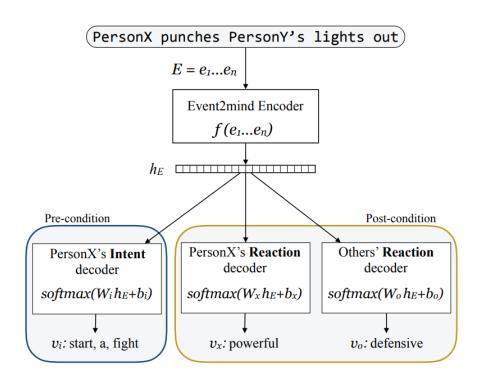

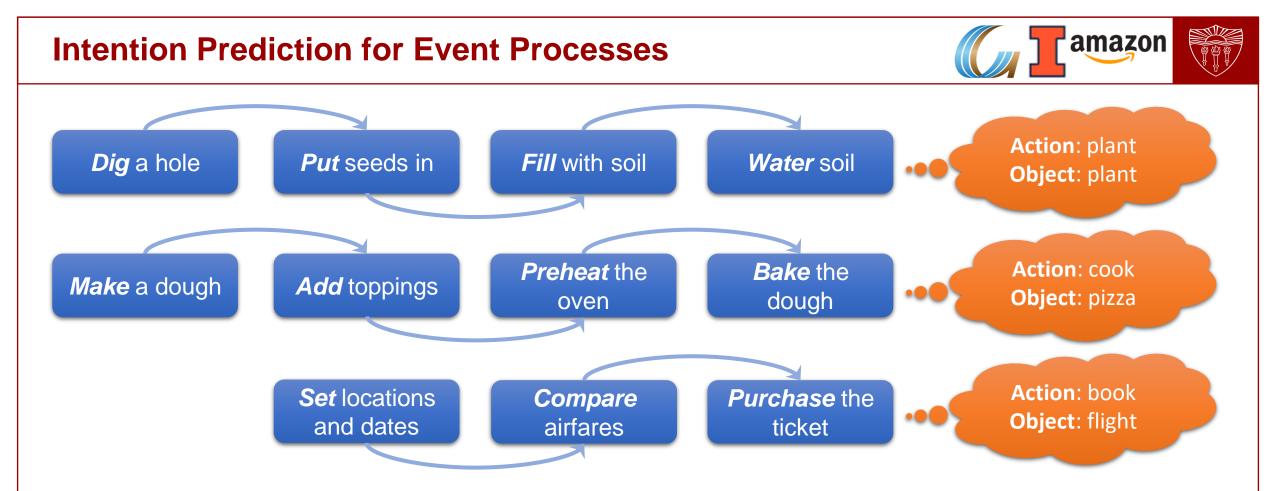

Event processes are directed by the **central goal**, or the **intention** of its performer [Zacks+, Nature Neuroscience 2001].

- Inherent to human's common sense.
- Missing from current computational methods.
- Important to machine commonsense reasoning, summarization, schema induction, etc.



Chen et al. "What are you trying to do?" Semantic Typing of Event Processes. CoNLL-2020

A new (cognitively motivated) **semantic typing task** for understanding event processes in natural language. Two **type axes**:

- What *action* the event process seeks to take? (action type)
- What type of **object**(s) it should affect? (**object type**)

This research also contributes with

- A large dataset of typed event processes (>60k processes)
- A hybrid learning framework for event process typing based on indirect supervision

A Large Event Process Typing Dataset




A large dataset of typed event processes from wikiHow

• 60,277 event processes with free-form labels of action and object types

A challenging typing system

- Diversity: 1,336 action types and 10,441 object types (in free froms)
- Few-shot cases: 85.9% labels appear less than 10 times, (~half 1-shot).
- External labels: in 91.2% (84.2%) processes, the action (object) type label does not appear in the process body.

A non-trivial learning problem with ultra fine-grained and extremely few-shot labels.

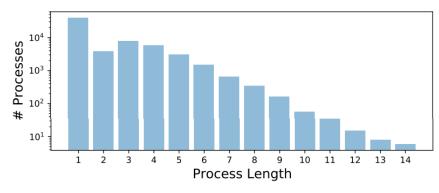

How

Figure 2: Distribution of process lengths.


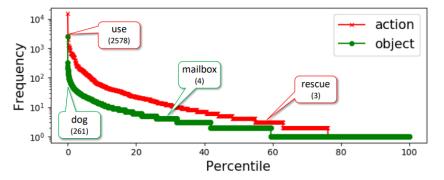


Figure 3: Distribution of actions and objects. Number of frequencies are shown in the brackets.

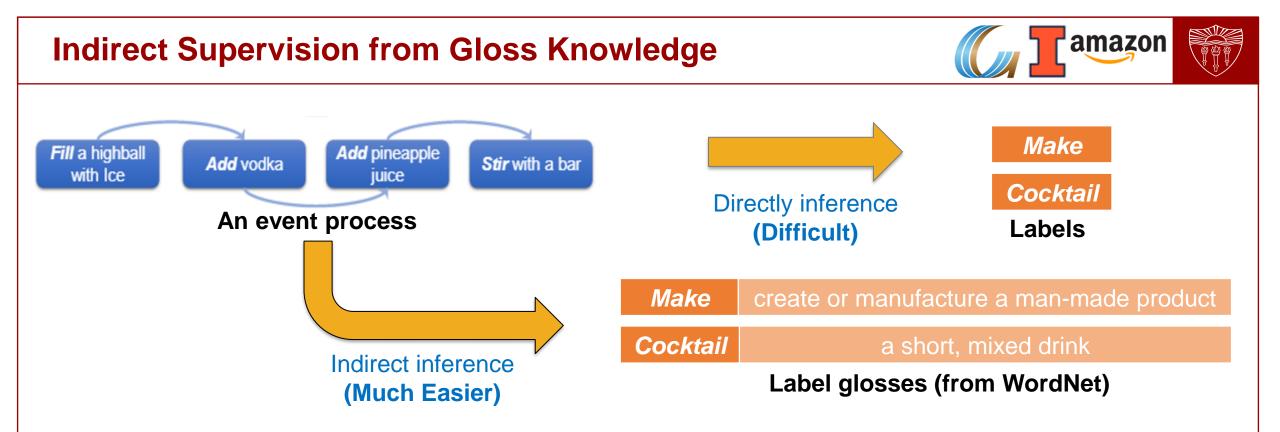


Why using label glosses?

- Semantically richer than labels themselves
- Capturing the association of a process-gloss pair (two sequences) is much easier
- Jump-starting few-shot label representations (and benefiting with fairer prediction)

Indirect Supervision from Gloss Knowledge



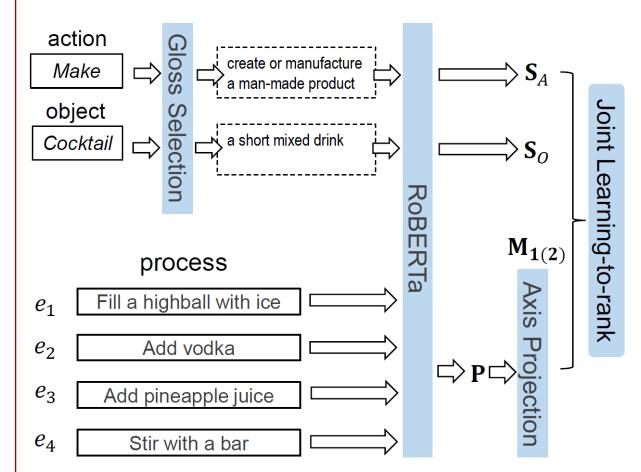

How to represent the process?

• RoBERTa encodes concatenated event contents (VERB and ARG1).

How to represent a label?

• The same RoBERTa encodes the label gloss

Which gloss for a polysemous label?

- WSD [Hadiwinoto+, EMNLP-19]
- MFS (Most frequent sense)

Learning objective?


 Joint learning-to-rank for both type axes (different projection)

Inference?

Ranking all glosses for all labels in the vocab

Results



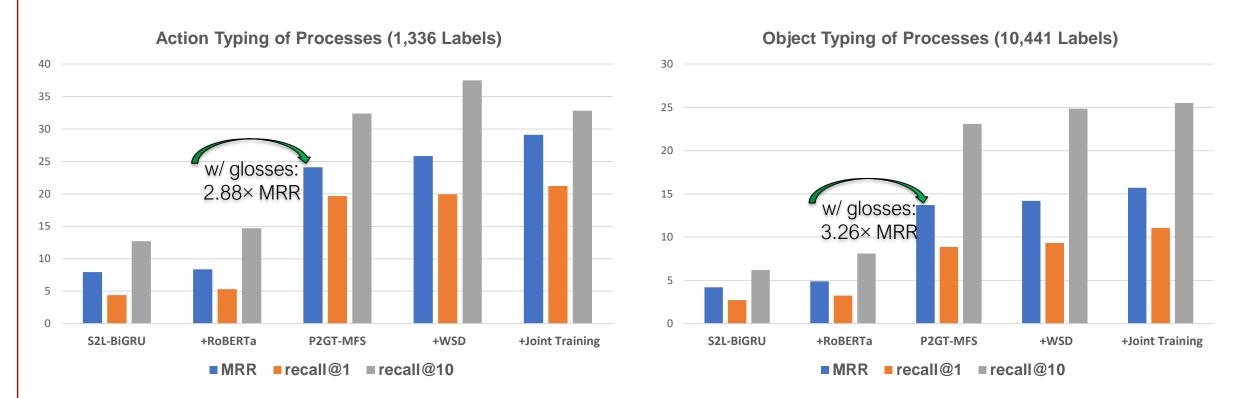

- Gloss knowledge brings along the most improvement (2.88~3.26 folds of MRR)
- Joint training indicates the effectiveness of leveraging complementary supervision signals
- Sense selection (WSD) leads to lesser improvement (predominant senses are representative enough)

Case Study



Event processes	Predictions
Make explosive materials \Rightarrow Obtain a container \Rightarrow Obtain shrapnel \Rightarrow Install a	A: detonate, assemble, blacken
trigger	O: grenade, blaster, mine
Go to DMV \Rightarrow Take photos \Rightarrow Take vision test \Rightarrow Take permit test \Rightarrow Take road test	A: obtain, verify, explore
Go to Diviv \Rightarrow Take photos \Rightarrow Take vision test \Rightarrow Take permit test \Rightarrow Take toad test	O: license, check, visa
Ignore order \Rightarrow Enter area \Rightarrow Enforce blockade \Rightarrow Force to retreat from area	A: conquer, disarm, invade
Ignore order \rightarrow Enter area \rightarrow Enforce blockade \rightarrow Force to retreat from area	O: barrier, soldier, fortress
Capture two opposition posts \Rightarrow Kill many fighters \Rightarrow Destroy three armed trucks	A: kill, demolish, fight
\Rightarrow Confiscate artillery guns	O: melee, conflict, stronghold
Cooperate with the counsel investigation \Rightarrow Open his remarks \Rightarrow Apologize many	A: respond, disagree, accept
times \Rightarrow Try to restore public trust	O: apology, disagreement, slander
Travel in a presidential motorcade \Rightarrow Be shot once in the back \Rightarrow Be taken to	A: survive, die, tackle
hospital \Rightarrow Be pronounced dead	O: assassin, crash, roadkill
Give advance notice \Rightarrow Give notice \Rightarrow Issue dividends	A: honor, pay, reward
Give advance notice \Rightarrow Give notice \Rightarrow issue dividends	O: finance, equity, subsidy
Target quotes \Rightarrow Target shares quotes \Rightarrow Ask to clarify offer \Rightarrow Challenge to merge	A: compare, maximize, negotiate
agreement \Rightarrow Challenge to merge businesses	O: prospectus, quote, settlement
Clean windows \rightarrow Buy plants \rightarrow Hang pictures \rightarrow Doint walls \rightarrow Correct floors	A: redecorate, decorate, refurbish
Clean windows \Rightarrow Buy plants \Rightarrow Hang pictures \Rightarrow Paint walls \Rightarrow Carpet floors	O: room, bedroom, makeover

Table 3: Case study for typing event processes in the news domain. The predictions are given by Joint P2GT-WSD trained on our full dataset. Each case is given top 3 predictions on both axes, whereof reasonably correct ones are boldfaced, and relevant ones are italic. Few-shot labels appearing up to 10 times in our dataset are in blue.

System Demonstration



A web demonstration of our prototype system is running at <u>https://cogcomp.seas.upenn.edu/page/demo_view/step</u>

Examples		
Decoration	~	
Event process (choo	ose an example or write the subevents of a proce	ess separated by '@' to get its intention)
clean windows @ I	buy plants @ paint walls @ hang pictures @ carp	pet floors @ reorganize furniture
Get intention >		

redecorate room


Cosine similarity	Action	Object	Cosine similarity
0.678	redecorate	room	0.623
0.650	stage	atmosphere	0.599
0.500	brighten	mosaic	0.589
0.427	preoccupy	suite	0.574
0.418	furnish	interior	0.573

Agenda






2. Event intention prediction

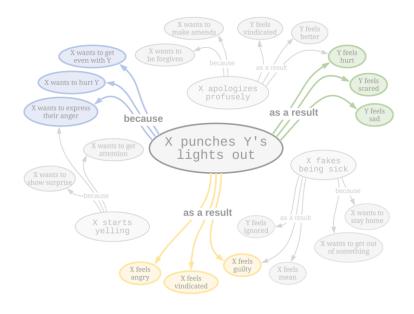

3. Event processes in downstream NLU tasks

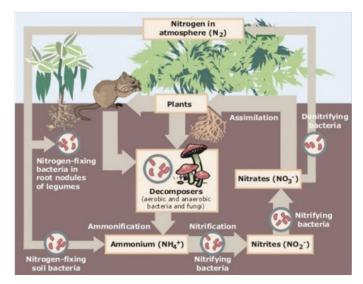

4. Open Research Directions



3. Topical consistency



The ROC Story Narrative Cloze Test [Mostafazadeh+, NAACL 2016]:

One day Wesley's auntie came over to visit. He was happy to see her, because he liked to play with her. When she started to give his little sister attention, he got **jealous**. He got **angry** at his auntie and **bit** his sister's hand when she wasn't looking.


Then what might happen?

O1: He was scolded.

O2: She gave him a cookie for being so nice.

Chaturvedi, et al (EMNLP, 2017) train a language model that captures three types of sequential features:

1. Event sequences in 20 years of NYT data

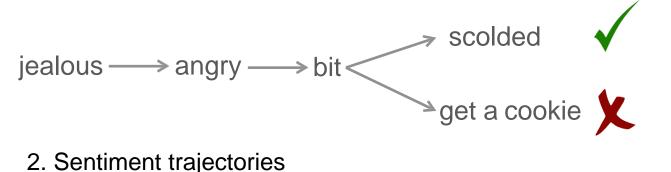

Features	Accuracy
All	74.4%
Event-sequence	71.6%
Sentiment	64.5%
Topic	55.2%

Event sequences are most important.

Machine Reading Comprehension



QA based on articles in biology


Water is split, providing a source of electrons and protons (hydrogen ions, H⁺) and giving off O₂ as a by-product. *Light absorbed* by chlorophyll drives a *transfer of the electrons and hydrogen ions* from water to an acceptor called NADP⁺.

What can the splitting of water lead to?

A: Light absorption

B: Transfer of ions

1. Extracting events and event-event relations from articles

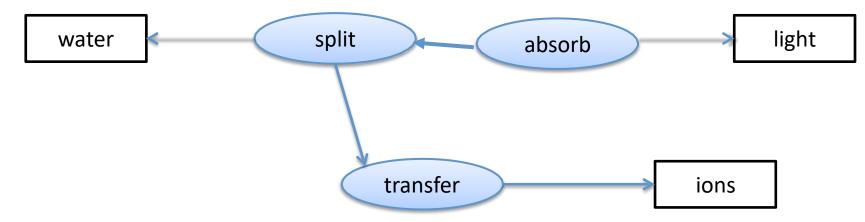

2. Matching questions and candidate answers with extracted event processes

Berant, et al. Modeling Biological Processes for Reading Comprehension. EMNLP, 2014 (Best Paper Award)

Video Segmentation




Events in a process as anchors of video segments. make pancakes: {add egg, add flour, ..., pour batter, remove pancake} wikiHow process: Video segments: background pour batter background remove pancake Video: Video narration: hey folks here welcome to my kitchen ... pour a nice-sized amount ... change the angle to show ... and take it out

Alignment learning between video narration and wikiHow event processes help action segmentation in videos.

Zhukov et al. Cross-task weakly supervised learning from instructional videos. CVPR 2019 Fried et al. Learning to Segment Actions from Observation and Narration. ACL 2020

Future Event Prediction in Videos



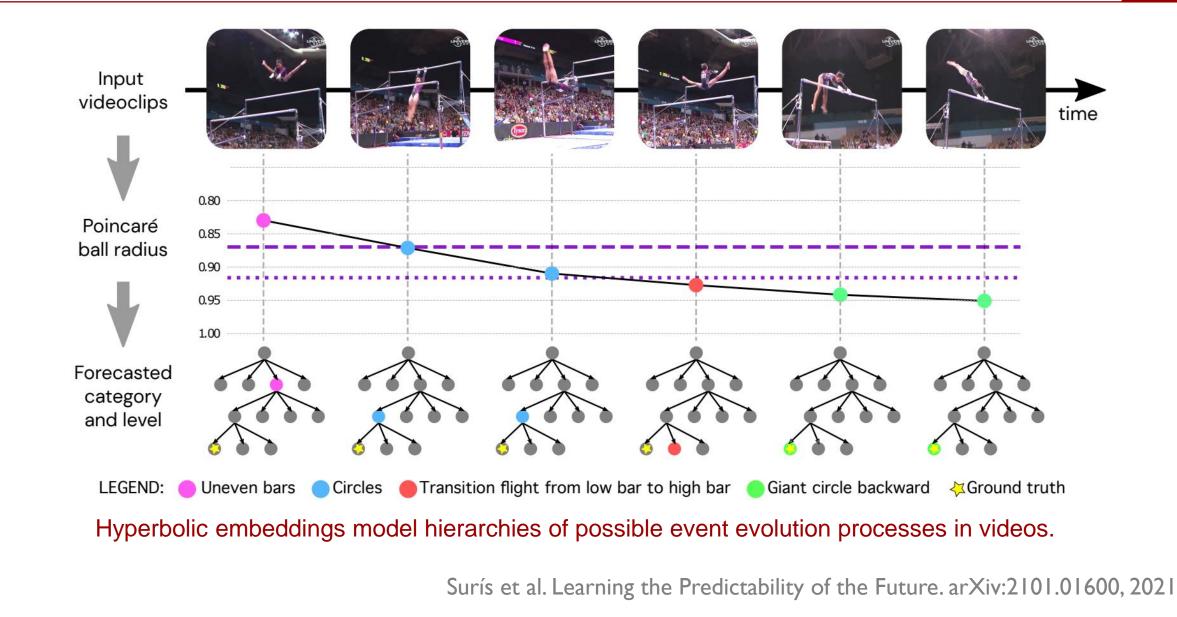

Agenda






2. Event intention prediction



3. Event processes in downstream NLU tasks

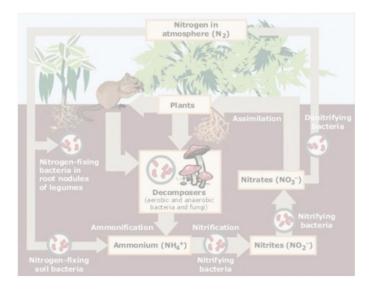


4. Open Research Directions



Salience Detection in Event Processes



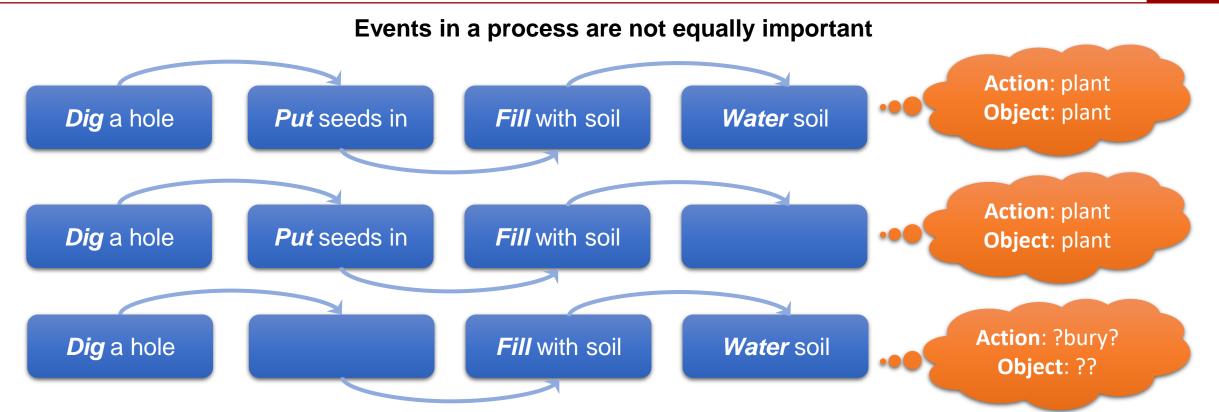

Defending your dissertation is essential; Doing a TAShip is less important; Doing an internship is optional...

Is there a way to automatically identify salient events in a process? Would that help downstream tasks such as abstractive summarization?

Reasoning About Ordering



Identifying the order of member events in a process is an unresolved challenge

Heavy <u>snow</u> is <u>causing disruption</u> to <u>transport</u> across the UK, with heavy <u>rainfall bringing flooding</u> to the south-west of England. Rescuers <u>searching</u> for a woman <u>trapped</u> in a <u>landslide</u> at her home in Looe, Cornwall, <u>said</u> they had <u>found</u> a body.

Q1: What events have already finished? A: searching trapped landslide said found Q2: What events have begun but has not finished? A: snow causing disruption rainfall bringing flooding Q3: What will happen in the future? A: No answers.

Q4: What happened before a woman was trapped? A: landslide Q5: What had started before a woman was trapped? A: snow rainfall landslide Q6: What happened while a woman was trapped? A: searching Q7: What happened after a woman was trapped?

A: searching said found


Ning, et al. TORQUE: A Reading Comprehension Dataset of Temporal Ordering Questions. EMNLP, 2020

User-provideo

• 3.2k news snippets with 21k human-generated questions querying temporal relationships


Lyu, et al. Reasoning about Goals, Steps, and Temporal Ordering with WikiHow. EMNLP, 2020

 A wikiHow-based testbed about event ordering (and more)

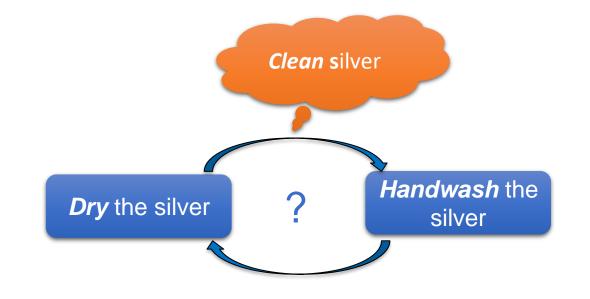


More Tasks



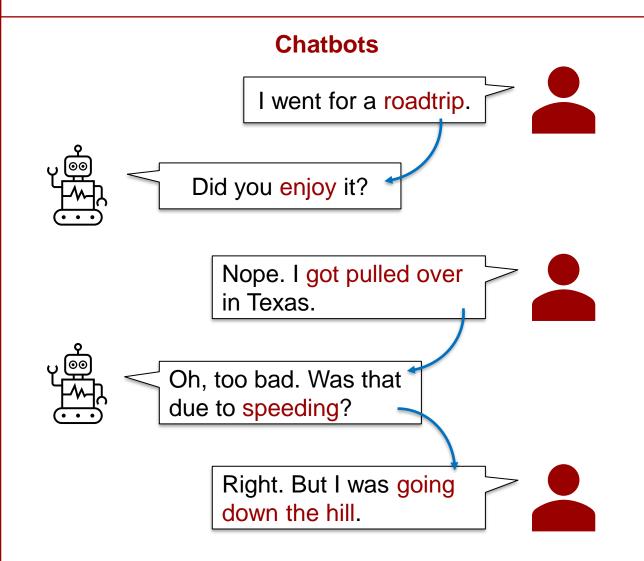

Can event processes improve the consistency of utterance generation/retrieval?

Understanding clinical event processes

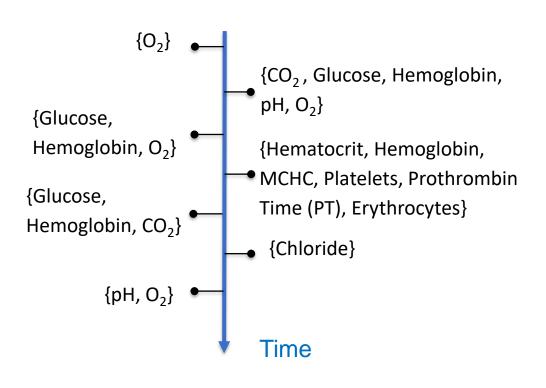

Diagnostic prediction (Zhang et al. AIME-20), phenotype prediction, ...

- Transfer learning can be important (naturally lack of data)
- Structured prediction can be important (dependency of phenotypes, disease labels)

References



- Zack, et al. Human brain activity time-locked to perceptual event boundaries. Nature neuroscience, 4(6):651– 655. 2001
- Chambers and Jurafsky. Unsupervised learning of narrative event chains. ACL, 2008
- Radinsky and Horvitz. Mining the Web to Predict Future Events. WSDM, 2013
- Berant, et al. Modeling Biological Processes for Reading Comprehension. EMNLP, 2014
- Chaturvedi, et al. Story comprehension for predicting what happens next. EMNLP, 2017
- Rashkin, et al. Event2Mind: Commonsense Inference on Events, Intents, and Reactions. ACL, 2018
- Liu, et al. Automatic event salience identification. EMNLP, 2018
- Zhukov et al. Cross-task weakly supervised learning from instructional videos. CVPR, 2019
- Zhang, et al. Analogous Process Structure Induction for Sub-event Sequence Prediction. EMNLP, 2020
- Chen, et al. "What are you trying to do?" Semantic typing of event processes. CoNLL, 2020
- Ning et al. TORQUE: A Reading Comprehension Dataset of Temporal Ordering Questions. EMNLP, 2020
- Lyu, et al. Reasoning about Goals, Steps, and Temporal Ordering with WikiHow. EMNLP, 2020
- Jindai, et al. Is Killed More Significant than Fled? A Contextual Model for Salient Event Detection. COLING, 2020
- Fried, et al. Learning to Segment Actions from Observation and Narration. ACL, 2020
- Zhang, et al. Diagnostic Prediction with Sequence-of-sets Representation Learning for Clinical Events. AIME, 2020
- Surís, et al. Learning the Predictability of the Future. arXiv:2101.01600, 2021



School of Engineering







Thank You

Muhao Chen. Homepage: <u>https://muhaochen.github.io/</u> Email: <u>muhaoche@usc.edu</u>

